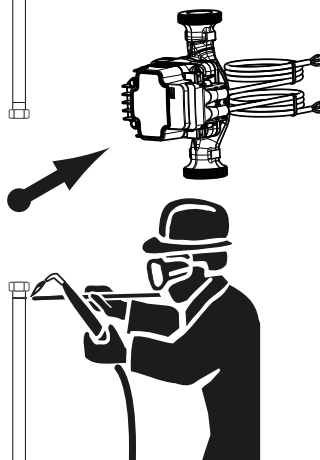





TacoFlow3 GenS Heating			
			
Min. +2°C	Max. +95°C	Min. +0°C	Max. +55°C

TacoFlow3 GenS Solar			
			
Min. +2°C	Max. +110°C	Min. +0°C	Max. +40°C

Heating	Solar
	
PB max 6 bar	PB max 10 bar
PB min 0.05 bar @ 75°C 0.55 bar @ 95°C	

	Glykol max: 40%
	IPX4D 95% RH < 33 db(A)



Connector position		Pump position	
	✓		✓
	✓		✓
	✓		✗
	✓		✗



Nur bei Anlagen mit Ausdehnungsgefäß und Rückschlagventil installieren.

To be installed exclusively on systems equipped with expansion tank and non-return valve.

Da installare esclusivamente su impianti dotati di vaso di espansione e valvola di non ritorno.

À installer exclusivement sur les systèmes équipés d'un vase d'expansion et d'un clapet anti-retour.

Instalar exclusivamente en sistemas equipados con vaso de expansion y válvula de retención.

